

Polycarbonate Quick Connectors

mdi Polycarbonate Quick Connectors are designed to provide reliable and easy connectivity in critical aseptic process steps in the manufacture of pharmaceuticals and biopharmaceuticals.

The special side wings in the female connector are provided to prevent accidental release of connection.

These connectors significantly improve the service ability of fluid systems by saving time, reducing the spills/leakage and increasing safety, while minimizing the risk of cross contamination likely to happen with reusable components.

mdi Quick Connectors are made up of materials which fulfill critical requirements such as wide chemical compatibility and minimal extractables. These can be sterilized by ETO or Autoclaved.





1/4" Female Connector



1/4" Male Connector

Special Features

- Extra Reliability: Special side wings on the female part designed to prevent accidental processing of the latch
- Wide ring on the male part to facilitate pressing while making a quick connection

Applications

- Transfer of sterile fluids
- Series connection
- Delivery and recovery lines
- Laboratory tubing connections
- Bio-reactor lines



3/8" Female Connector



3/8" Male Connector



Female Plug



Specifications

Materials of Construction	Main Body:	Polycarbonate	
	O-rings:	Platinum cured Silicone	
Tubing Sizes		1/4" (6.3mm)	
(Internal Diam	eter)	3/8" (9.5mm)	
Operating Pressure		Vacuum to 60 psi	
Operating Temperature		- 60° C to 125° C	
Fiber Release		Complies with USFDA CFR Title 21, Part 211.72	
Sterilization	Autoclave:	5 autoclaving cycles at 125 °C for 30 minutes each. Sterilize uncoupled only	
	EO Sterile	Sterilizable by Ethylene Oxide	
Biosafety	Class VI Plastics:	Passes biological tests for Class VI Plastics as described in USP <88>	
	Cytotoxicity:	Passes biological tests for Cytotoxicity as described in USP <87>	


Part and Size	Compatible	Dimensions	
Part and Size	Tubing ID	Length	Width
Female Connector	1/4″	24.5 mm	33 mm
remaie connector	3/8″	24.5 mm	33 mm
Male Connector	1/4″	17.6 mm	33 mm
Male Connector	3/8″	17.6 mm	33 mm
Female Plug	Not Applicable	24.5 mm	33 mm
Male Plug	Not Applicable	17.6 mm	33 mm

Ordering Information

Chemical Compatibility Chart

Acetic Acid	R
Acetone	R
Acetonitrile	NR
Ammonium Hydroxide	R
Benzene	NR
N-Butanol	R
Citric Acid	R
Cotton Seed Oil	R
Cresol	NR
Dichloromethane	NR
Ethyl Acetate	NR
Ethyl Alcohol	R
Ethylene Glycol	R
Formaldehyde	R
Glycerol	R
Glycol	R
30% HCL	R
Hydrogen Peroxide	R
Isobutanol	R
Isopropanol	R
Lactic Acid	R
Methanol	R
Mineral Oil	R
Nitric Acid	R
Polyethylene Glycol	R
Propylene Glycol	R
Na OH	R
Urea	NR
Vegetable Oil	R

R = Recommended, NR = Not Recommended

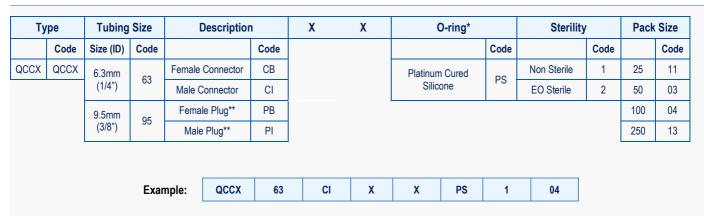

* Platinum cured Silicone O-ring is not a part of female connectors and female plug. The 15 digit product code for these will have XX instead of PS. ** Tubing Size is not applicable to female plug and male plug. The 15 digit Code for these will have XX instead of tubing size code.